



Pyrolysis Process Development at Advanced Fuel Research, Inc. (AFR)

By Michael A. Serio, AFR, East Hartford, CT USA



AFR has been involved for several years in R&D on the pyrolysis-based conversion of biomass into fuels, chemicals and materials [1]. More recently, this work has also involved process development, such as a prototype waste pyrolyzer for spacecraft use [2- 7] and the pyrolysis processing of animal manure for remote power generation [8,9].

1. Pyrolysis chamber
2. Gasification chamber
3. Post oxidation chamber

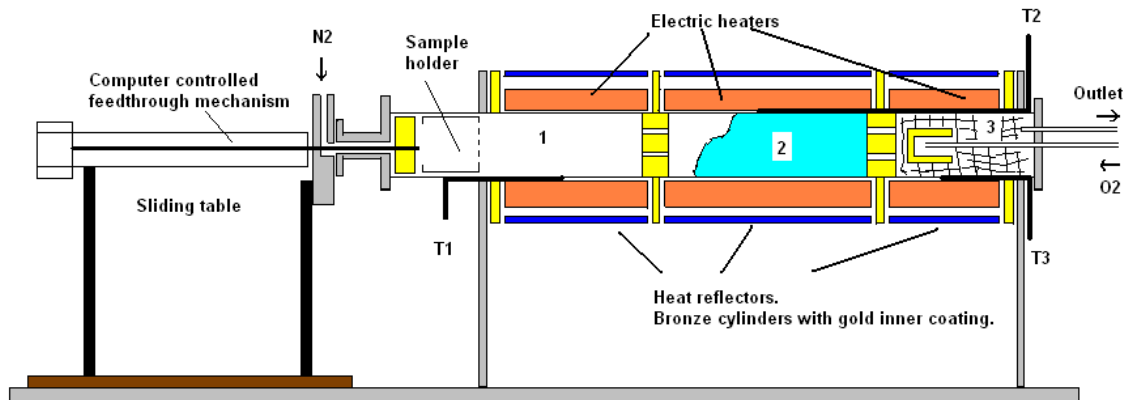


Figure 1. Schematic of AFR Three-Stage Pyrolysis/Oxidation Reactor System.

A schematic of the current NASA prototype reactor system is shown in Figure 1. That prototype was designed for studying the pyrolysis of mixed solid waste streams, including paper, soap, plastic, and inedible plant biomass, which are relevant to spacecraft activities. During the initial processing step, the first stage is the primary pyrolysis zone, for thermal decomposition of the sample into gases, liquids and a char residue, while the second stage contains a catalyst bed for decomposition of the liquids, and the (optional) third stage contains a catalyst bed for oxidation of the volatiles. Each of these stages are heated independently (~673-973 K for the first stage, 1323 K for the second stage, 973 K for the third stage). During the second-processing step, the purge gas is switched to CO₂ (or H₂O) and gasification of the char can occur in the first stage (if desirable) while gasification of the carbon deposits

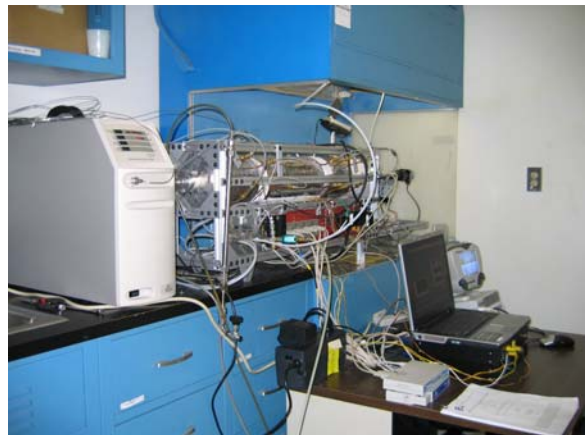


Figure 2. Picture of AFR Prototype Pyrolyzer and Control Computer.

from the cracked oils will occur in the second stage. Alternatively, the conditions in the first stage can be adjusted to provide activation of the char or no reaction at all, in which case the char can be removed and used for some other purpose. A picture of the current AFR prototype reactor installed at the NASA Ames Research Center is shown in Figure 2. It is anticipated that a suitably modified system could be used in terrestrial applications to produce fuel gases from wastes for distributed power generation

A set of experiments was done under similar conditions in an earlier version of the NASA prototype reactor [2] with wheat straw and poultry litter (see Table 1) samples and these results are shown in Table 2. The yields for char were about 10 wt % higher for poultry litter than for wheat straw, which is consistent with the higher amount of ash in the starting material (see Table 1). The yields of H₂ are somewhat lower from poultry litter than from the wheat straw sample, which is probably due to the fact that much of the hydrogen in the starting sample ends up as NH₃ in the product gas. The yields of CH₄, CO, and CO₂ were generally similar in either case.

Table 1 – Composition of various waste samples used in prototype pyrolyzer (wt. %, dry, ash-free basis)

Sample	Ash ^a	C	H	O	N	S
Local Wheat Straw	6.0	49.0	6.1	42.9	1.8	0.20
Poultry Litter ^a	22.1	47.4	6.5	39.5	5.6	1.0
Notes:	a=dry basis					

Table 2 – Typical Results from Pyrolysis of Wheat Straw or Poultry Litter (wt. %, as-received basis)

Product	Sample Type	
	Wheat Straw	Poultry Litter
Char	30.8	40.8
H ₂ O	7.8	14.3
Carbon	3.3	4.9
Trap & Filter	7.6	3.4
Total Gases	50.2	38.2
H ₂	2.0	0.8
C ₂ H ₄	0.2	0.3
CH ₄	2.9	3.3
CO ₂	24.9	20.3
CO	16.4	13.5

References

- 1 Serio, Michael A., "Pyrolysis Research at Advanced Fuel Research, Inc. (AFR), PyNe Newsletter, Issue 12, September 2001.
- 2 Serio, M.A., Kroo, K., Wójtowicz, M.A., Suuberg, E.M., and Filburn, T., "An Improved Pyrolyzer for Solid Waste Resource Recovery in Space," 32nd International Conference on Environmental Systems, San Antonio, TX, July 14-18, 2002, SAE paper no. 2002-01-2402.
- 3 Serio, M., Kroo, E., Florczak, E., Wójtowicz, M., Wignarajah, K., Howard, K., and Fisher, J., "A Hybrid Pyrolysis/Oxidation System for Solid Waste Resource Recovery," SAE Paper No. 2004-01-2380.
- 4 Fisher, J., Wignarajah, K., Howard, K., Serio, M., and Kroo, E., "An Evaluation of a Prototype Dry Pyrolysis System for Destruction of Solid Wastes," SAE Paper No. 2004-01-2379.
- 5 Serio, M.A., Kroo, E., Florczak, E., Wójtowicz, M.A., Wignarajah, K., and Fisher, J., "A Prototype Pyrolysis/Oxidation System for Solid Waste Processing," SAE Paper No. 2005-01-3083.
- 6 Serio, M.A., Kroo, E., Wójtowicz, M.A., Suuberg, E.M., Wignarajah, K., and Fisher, J., "Carbon Production in Space from Pyrolysis of Solid Waste," SAE 2006-01-2183, presented at the 36th International Conference on Environmental Systems, Norfolk, VA 2006.
- 7 Serio, M.A., Kroo, E., Florczak, E., Wójtowicz, M.A., Wignarajah, K., Hogan, J., and Fisher, J., "Pyrolysis of Mixed Solid Food, Paper, and Packaging Wastes," SAE 2008-01-2050, presented at the 38th Int. Conf. on Environmental Systems, San Francisco, CA 2008.
- 8 Serio, M.A., Kroo, E., and Wójtowicz, M.A., "Biomass Pyrolysis for Distributed Energy Generation," ACS Division of Fuel Chemistry Preprints, 48(2), 584 (2003).
- 9 Serio, M.A., Basilakis, R., Kroo, E., and Wójtowicz, M.A., "Pyrolysis Processing of Animal Manure to Produce Fuel Gases," ACS Division of Fuel Chemistry Preprints, 47(1), 588 (2002).

For further details contact:

Dr. Michael A. Serio, President
 Advanced Fuel Research, Inc.
 87 Church Street
 East Hartford, CT 06108-3728
 Tel: 860-528-9806, ext. 105
 Fax: 860-528-0648
 Email: mserio@AFRInc.com